

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number  
**WO 2005/042993 A1**

(51) International Patent Classification<sup>7</sup>: **F16C 33/12**

(74) Agent: **FORRESTER KETLEY & CO**; Forrester House,  
52 Bounds Green Road, London N11 2EY (GB).

(21) International Application Number:  
PCT/GB2004/003908

(22) International Filing Date:  
13 September 2004 (13.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0323095.0 2 October 2003 (02.10.2003) GB

(71) Applicant (for all designated States except US):  
**MINEBEA CO. LTD.** [JP/JP]; 4107-73 Oaza Miy-  
ota, Miyota-Machi Kitasaku-gun, Nagano 389-0293 (JP).

(72) Inventor; and


(75) Inventor/Applicant (for US only): **SMITH, Paul, Ram-  
mond** [GB/GB]; NMB-Minebea U.K. Ltd., Doddington  
Road, Lincoln LN6 3RA (GB).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SELF-LUBRICATING BEARINGS

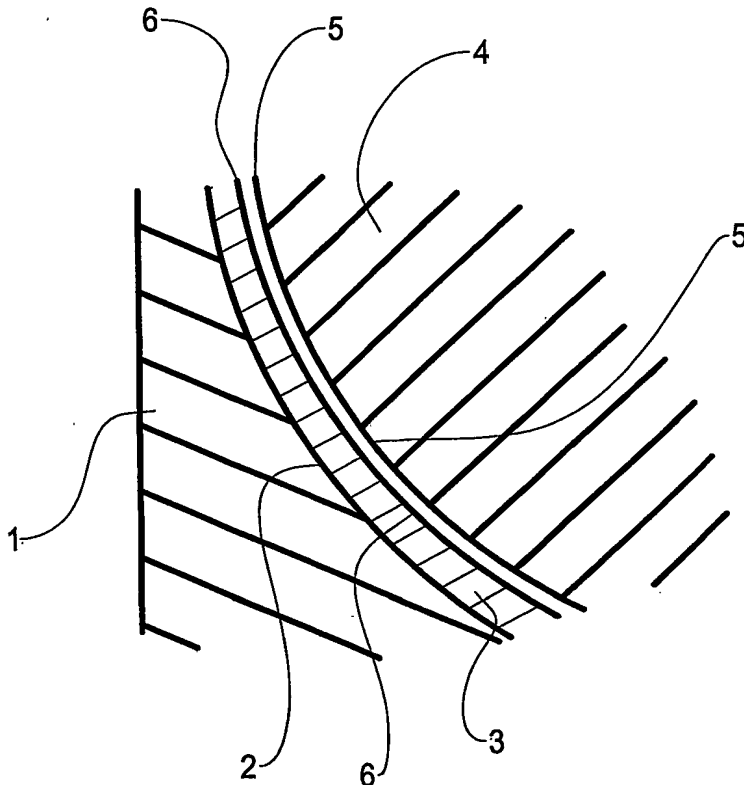

(57) Abstract: A self-lubricating bearing for  
use in low pressure, high frequency, small  
amplitude applications and methods of operating  
and constructing the same, the bearing having  
a self-lubricating liner (3) and a counterface  
surface (5) in close sliding contact therewith,  
the counterface surface (5) having a surface finish  
of less than 20nm and a hardness of less than in  
the region of 1000VHN.

WO 2005/042993 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*